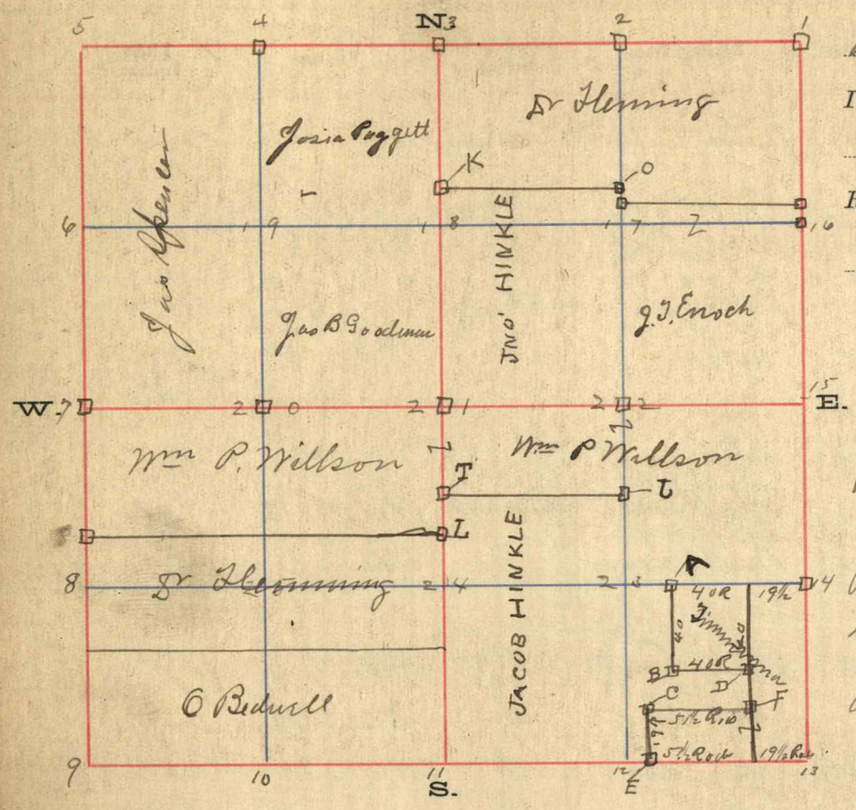

May 1 1891

I commenced Survey of Section 7 Town 6 North, Range 7 West.

E.F. Cox
County Surveyor.

Calvin Smith } CB
Thos Ottaver }
Jim. Dorherty } 2B
Sum

Return 10 days notice by Jacob Hinkle & Josia Baggett all parties Notified

Corners Established.	Monument.	Bearing Trees.	Diameter in Inches.	Course.	Links Distant.	
A 14.38 chs Met. E 4 S.E.	Stone	Black Walnut	16	N 9½ E	339	
B	"	White Oak	12	S 64½ W	22½	
		Sugar	10	S 67¼ E	50	
C	"	Hickory	7	N 44½ E	49¾	
		White Walnut	12	S 29 W	93½	
E 12.43 chs W. SE	"	Hickory	24	S 85¼ W	344	
		do (Double)	12	N 82 E	494	
F.	"	White Oak	10	N 16¾ W	55	
D		do do	10	S 81¼ W	67½	
O	"	do do	12	S 55½ E	38	
		Bur do	12	S 44½ W	108½	
K	"	Hickory	14	S 65 E	155½	
		do	14	S 71¾ W	88	
L	"	Maple	24	N 52½ E	88	
T		"	24	S 22½ E	232½	10. chs S. Cor 1/4
J						
H						
1	Stone	Bur Oak	12	N 66 E	26	
		do do	12	S 16 E	51½	
16		do do	10	N 87½ E	26	
		do do	8	S 19½ W	51¼	
7		Elm	10	N 42½ E	35	
		do	4	S 24½ E	45	
3		Stone	W	S 40 W	50	
2		Water Oak	14	N 61 W	80	
		Stone	W	Corth	50	
4		Blk Walnut	6	S 87¼ E	125	
		Persimmon	10	N 38¾ W	182	
21		Maple	4	S 81¾ W	45	
		do	14	N 10 E	130	
20		Water Oak	8	N 89 W	184½	
		do do	5	N 2 W	311	
22		Blk Walnut	8	N 48¾ W	72½	
		do do	8	N 62½ E	49	
14		do do	16	S 3¾ W	227½	
		do do	5	N 37¾ E	69½	
E 12.53 ch W SE	Stone	S 84½ W		S 84½ W	324	

Magnetic Bearings

COURSE.	DISTANCE.	REMARKS.		
West. From NE Cor	20 80	N¼NE	7 links North	3.30
" " N¼NE	41 60	N¼		
" " N¼	54 80	N¼NW		
" " N¼NW	68 00	NW.		
South " NW Cor	41 28	W¼	36 L. East	3.00
" " W¼	82 56	SW. Cor		
North " SE Cor	20 65	E¼ SE	On true line.	
	41 30	E¼ Found Original B.T. Standing		
	62 05	E¼ NE.		
	82 81	NE. Cor. This line, being on true line Est. NE Cor at intersection of North line		

On Northern line I proportioned the Gain in difference of Chaining giving to Each ¼¼ its proportion 4 and a fraction of a link to Each 4 Rod